


Item :

124FS15 PRESSURE FOAM SPRAYER EPDM

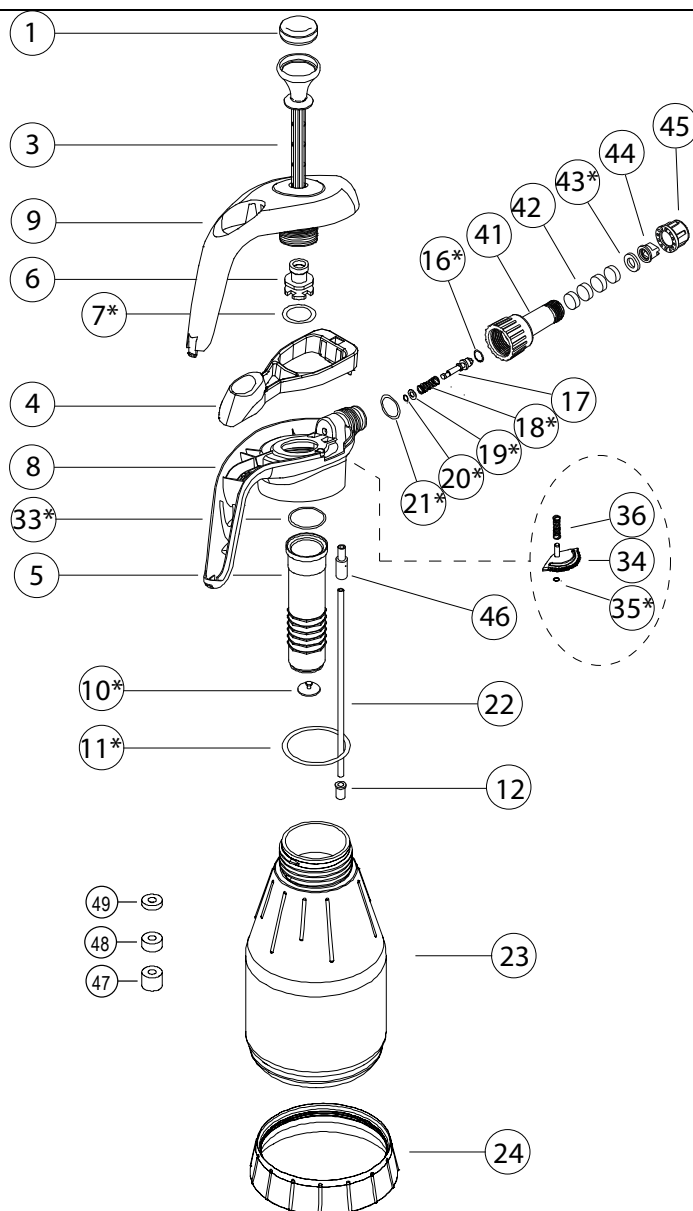

Technical Characteristics:

	u.m.	
Total capacity	ml	1860
Working capacity	ml	1000
Total weight	g	463
Container weight	g	220
Total height	mm	316
Container height	mm	232
Container height w-bottom	mm	242
Container diameter	mm	203
Ø Container w-bottom	mm	305

Parts marked with " * " are available as spare parts.

Item : 124FS15 PRESSURE FOAM SPRAYER EPDM

Pos.	Code	Description	Material
1	B6A	Knob Cover	PP
3	B6D	pumping rod	PP
4	B6M	Trigger	PP
5	B6O	Cylinder	PP
6	B6B	Washer Holder	PP
7*	A72231	'O' ring 22 x 3	EPDM
8	B6IV	Body	PP
9	B6LP	Cover Body	PP
10*	A91003	Non return Valve	EPDM
11*	A52321	'O' ring 50 x 3	EPDM
12*	B10510	Filter	PP
16*	A50102	'O' ring 6.75 x 1.78	EPDM
17	B6E0	Pin Valve	PP w/20% fiber glass
18*	A20092	Spring	St. Steel cov. w / teflon
19	B6F0	Washer	PP w/20% fiber glass
20*	A50081	'O' ring 1.78 x 4.48	EPDM
21*	A71631	'O' ring 16 x 3	EPDM
22	B00070	Dip Tube	LDPE
23	F5600US0	Container : 1500	PEHD
24	B6U	Bottom Cover Archetype 1,5	PP
33*	A51211	'O' ring 2.62 x 29,82	EPDM
34	B6N	Valve	PP
35*	A50086	'O' ring 1.78 x 1.78	EPDM
36	A20058	Spring	St. Steel Aisi 302
41	B66F	Foam lance	PP
42*	A39990	Disk felt	PET fiber
43*	A51240	Gasket 15x8x2	FPM
44*	A39965	110°	POM C / acetal
45	A39960	11/16" Nozzle	PP
46	B6R	Dip tube connector	PP
47	A39995	Spacers Rid.3	PP
48	A39996	Spacers Rid.2	PP
49	A39997	Spacers Rid.1	PP

Dati tecnici / Technical Data:

50 pumps (empty)	bar	1,2
50 pumps (50%vol)	bar	2,8
15 pumps (max vol)	bar	2,4
Delivery capacity at 3.0 bar Gittata a 3,0 bar	ml/min	810
Range at 3,0 bar	Max m	0,8
Foam delivered at 3 bar		
from 1.5 level	g	14
from 1.0 level	g	50
Spray angle	°	110

Item :

124FS15 PRESSURE FOAM SPRAYER EPDM

Jet Size with delivery foam product **

from 0.5m

cm 65

from 0.7m

cm 93

Max pressure w/release valve

bar 3 +/- 0,4

With a manual depressurizing valve

Bottle with scale marks from 0 to 1500ml Div.500ml & dilution scale in %

Seals

FPM

Pumping system

PP

Pumping capacity

ml 57

Average pressure

bar 1,5

Max pressure

bar 3

Use temperature

max + 30

Min +5

Packaging

- Pieces per carton 8
- Outer per layer 8
- Layers 4
- Pieces for pallet 256

Compatibility

The plastic materials used are compatible with a wide range of products, in contrary the seals which are more selective, therefore we recommend the customer to effect preliminary tests for full compatibility.