


ET1117B

GEAR TYPE UNIVERSAL K/D RACK
PAT. M 252610 USA PAT. 7093809




Accessory:
B1117-1 Drain Pan




- Application: V6, V8, V10, V12 and general engines.
- Technical information:
 1. With two strong support frames, make it stable while rotating engine.
 2. By turning the handwheel(1), can adjust the distance between two frames. Save time and labor!
 3. It can be rotated 360 degrees by turning the handwheel (2). Applicable to any kind of engines and transmissions.
 4. Capacity:500 KG

BMW N62&N73 Engine

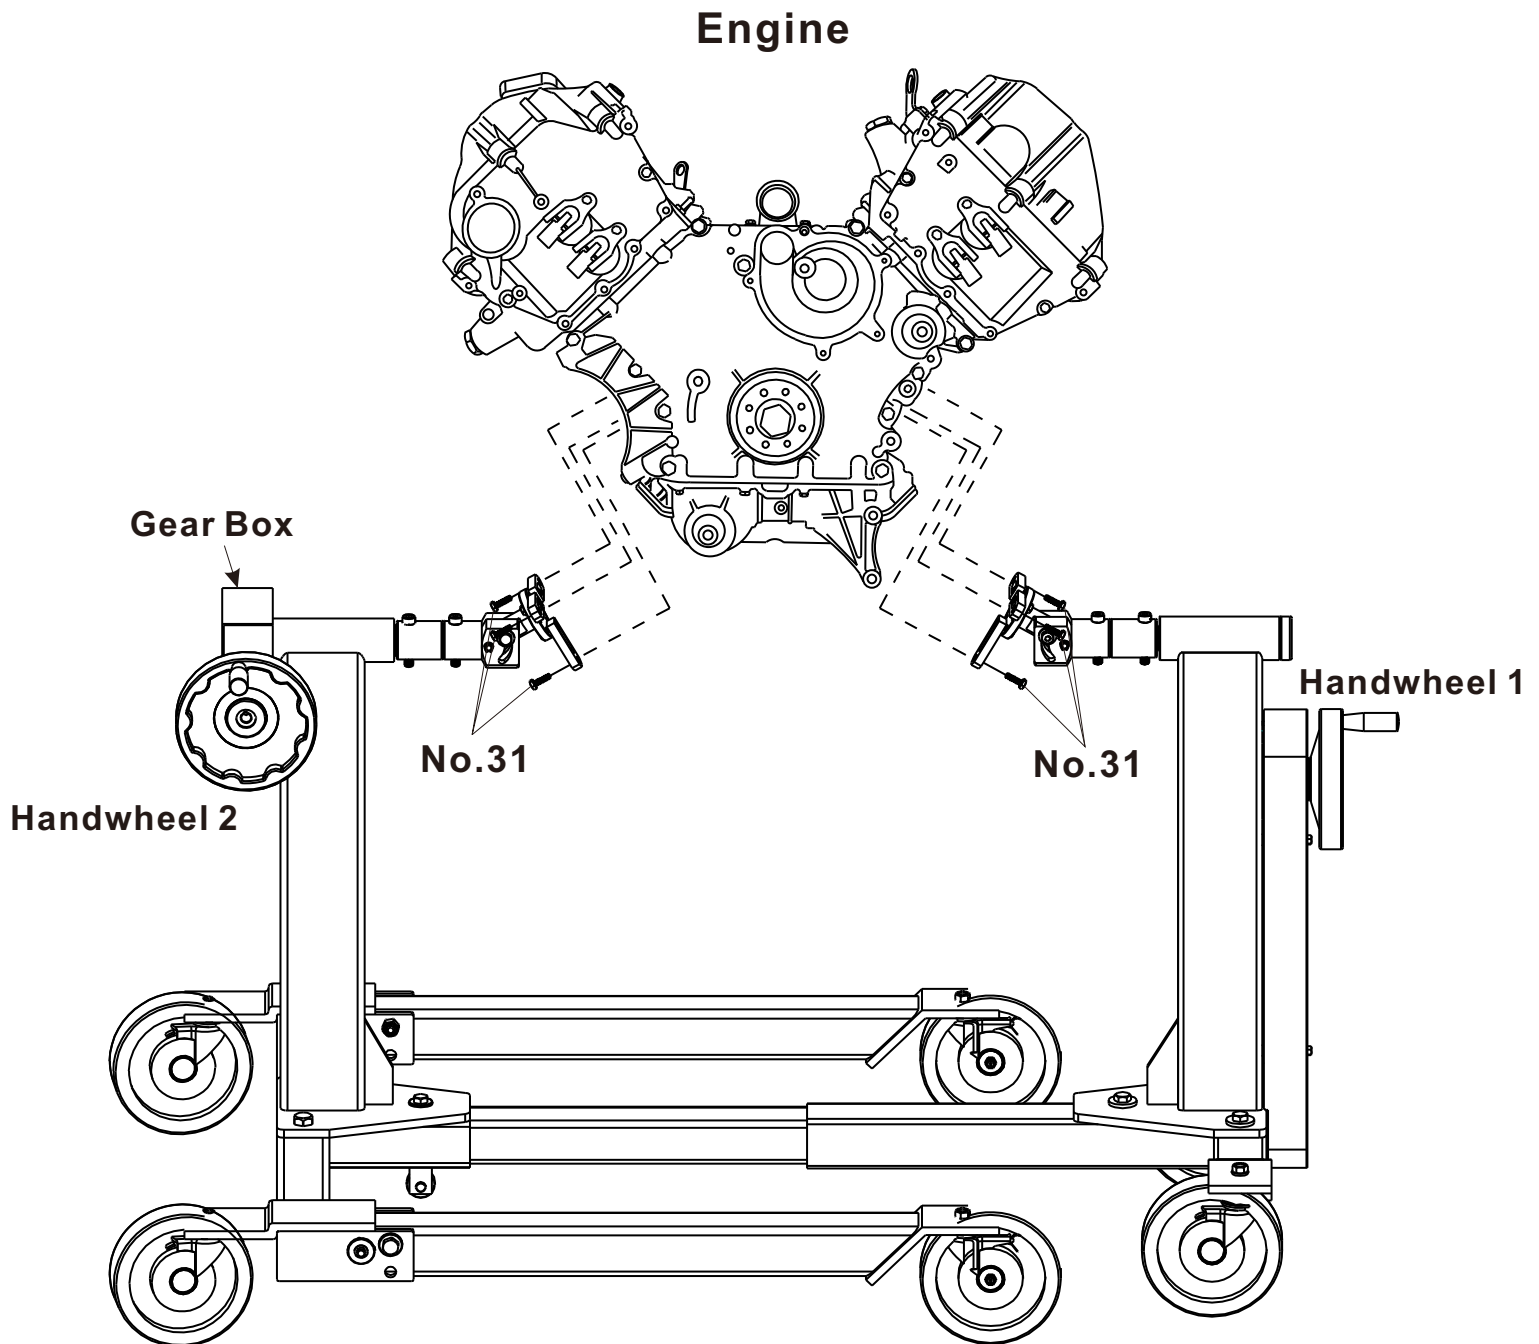


Combination of Main Body


1. Take out the washer and screw of the picture.

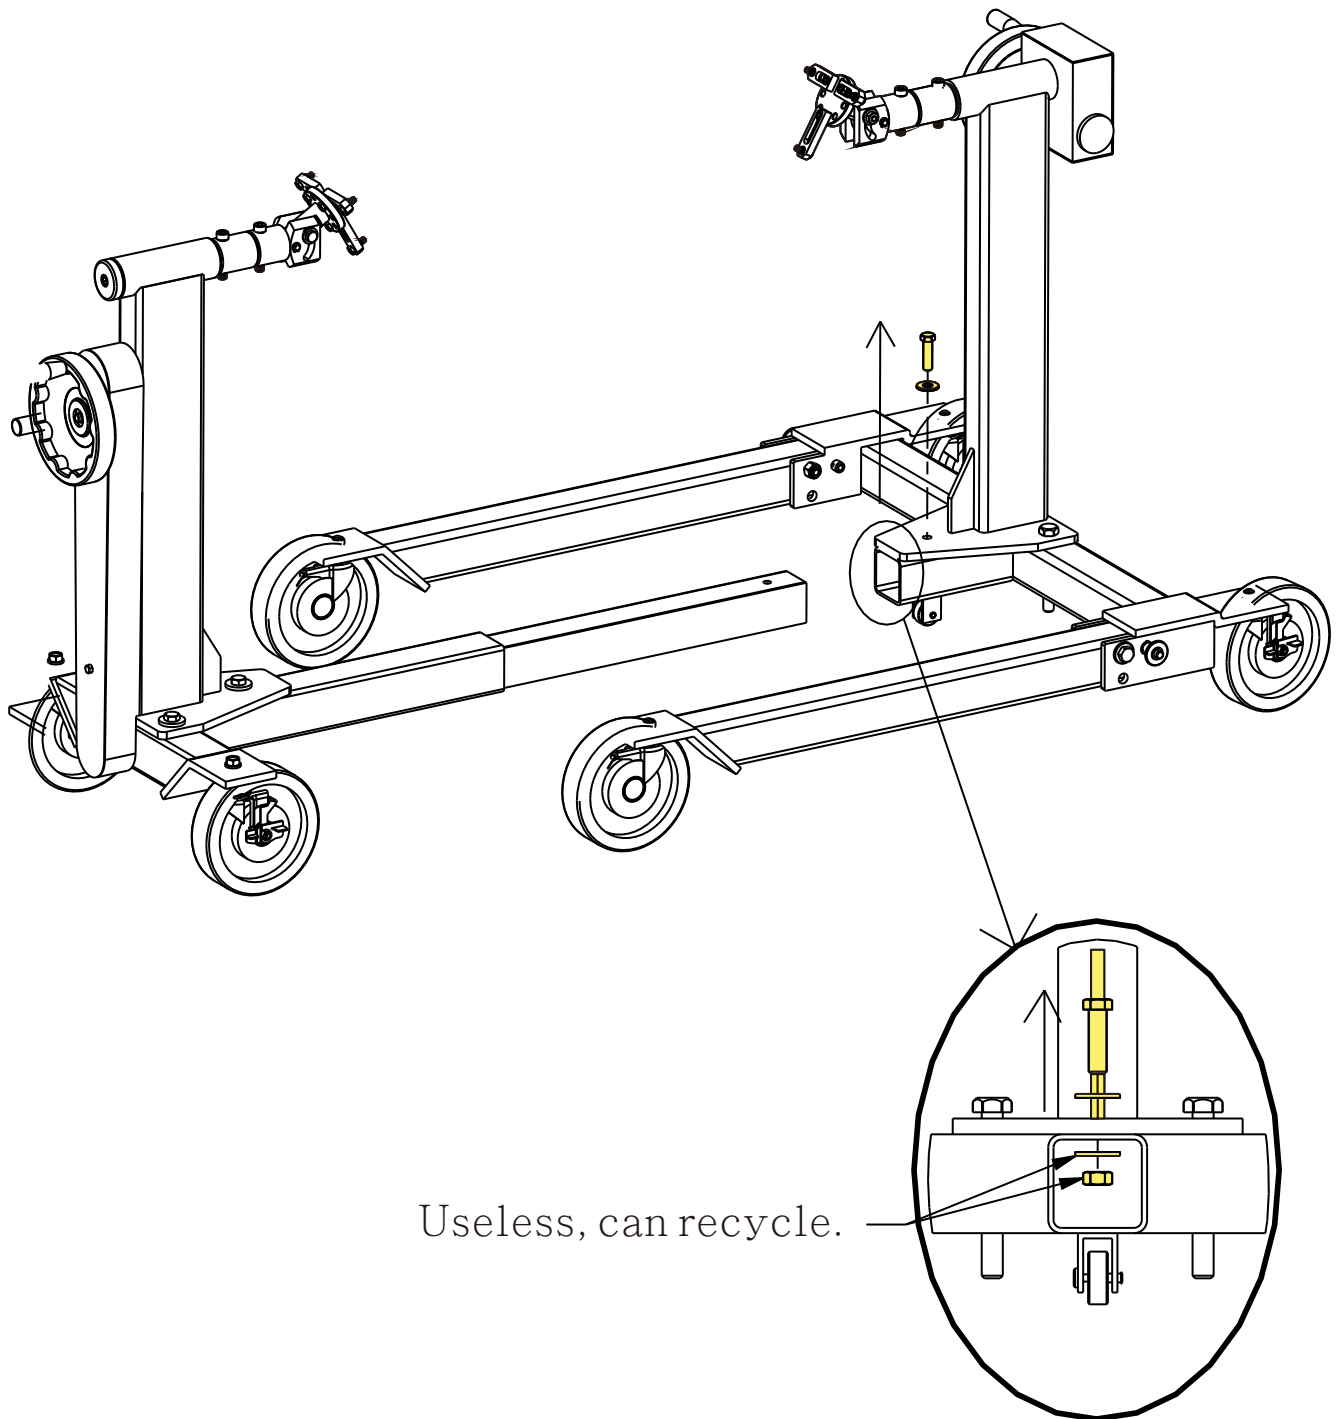



2. ■ Connect to main body and align to screw hole

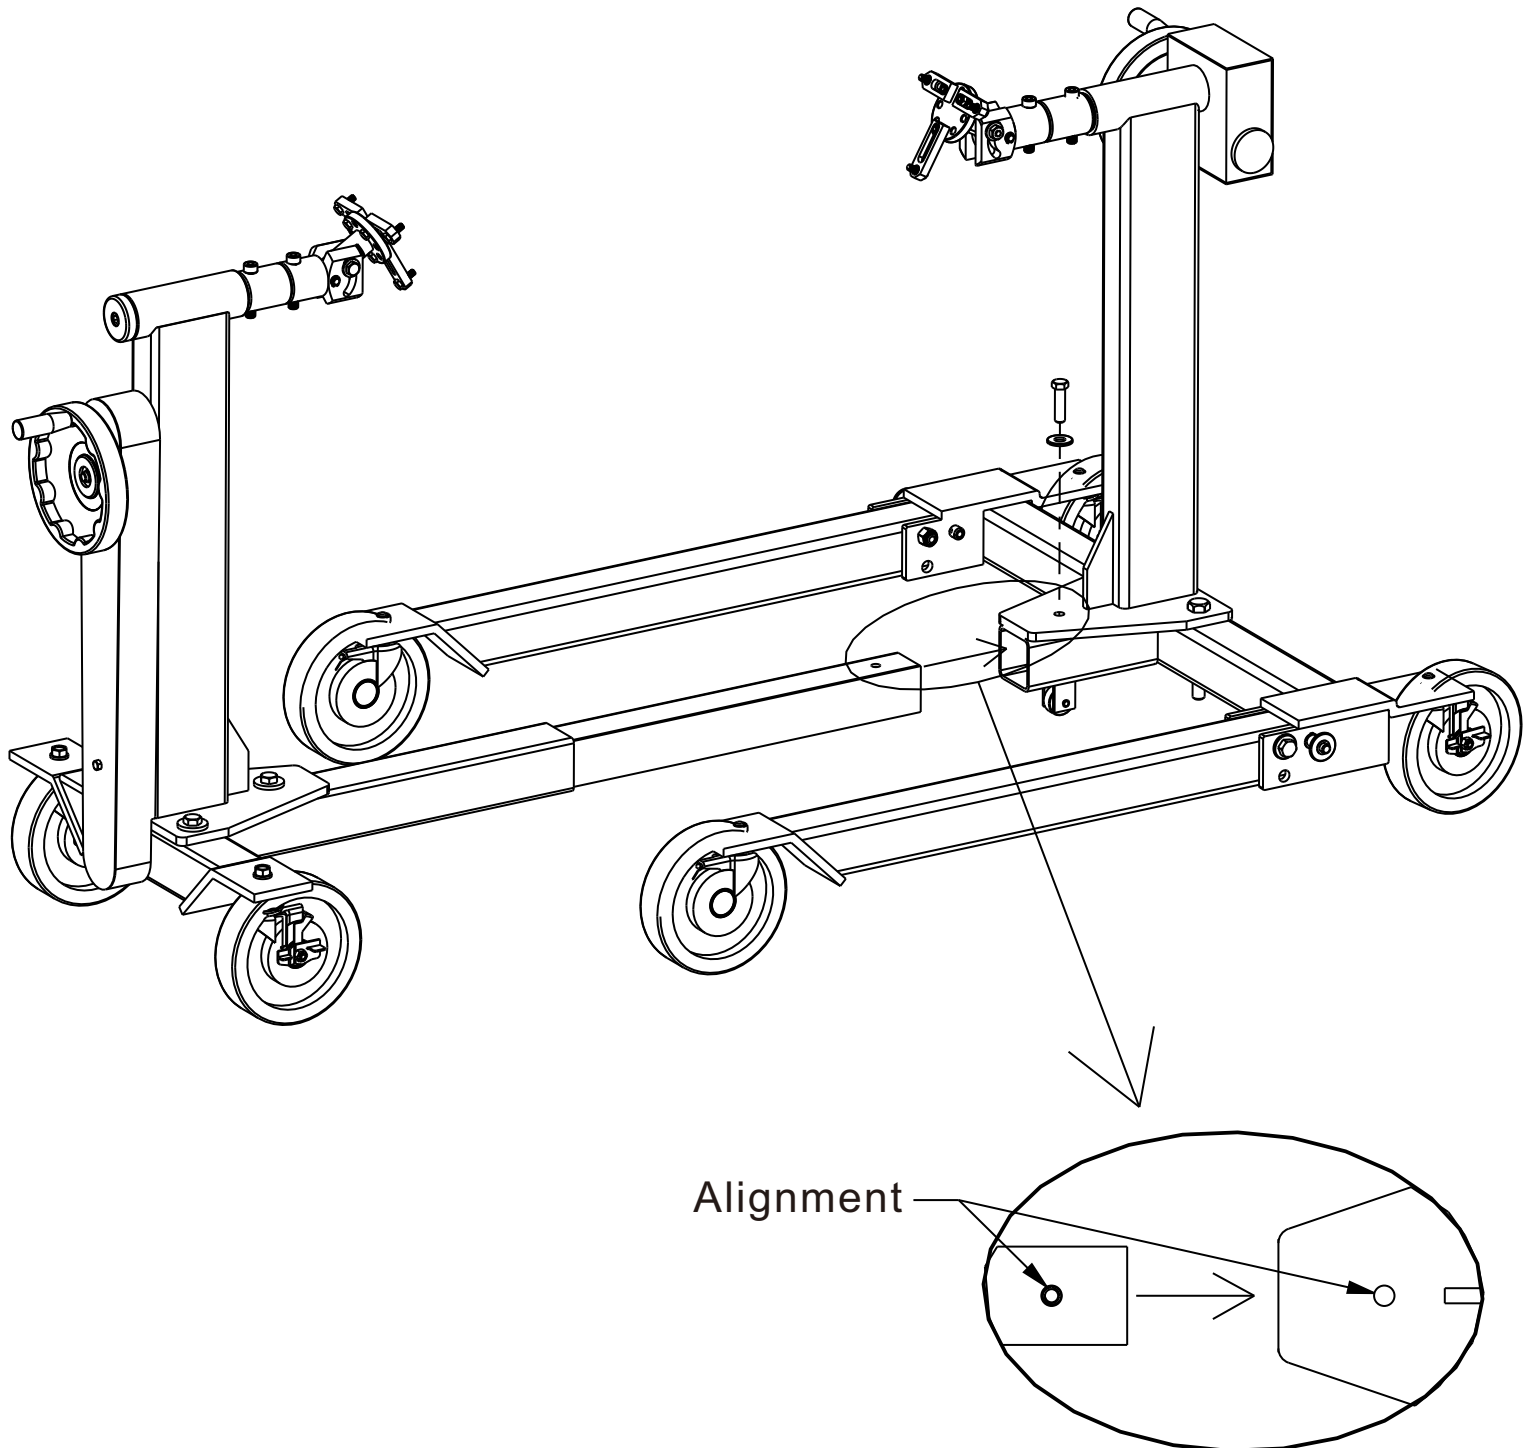

3. ■ Screw into washer and screw and then finish

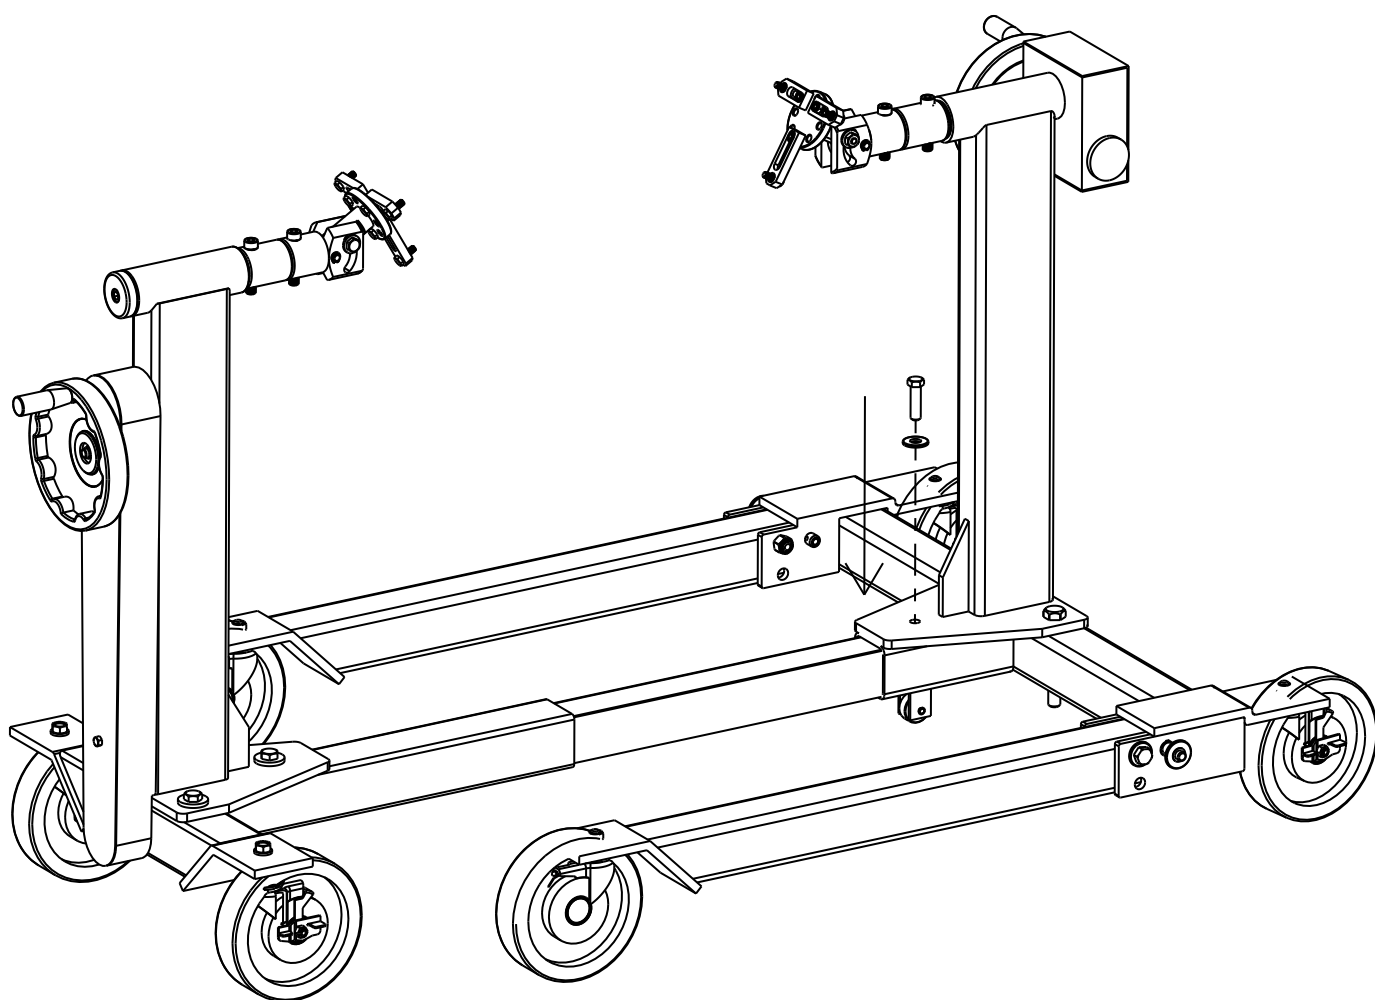


Adjust distance 200mm~600mm

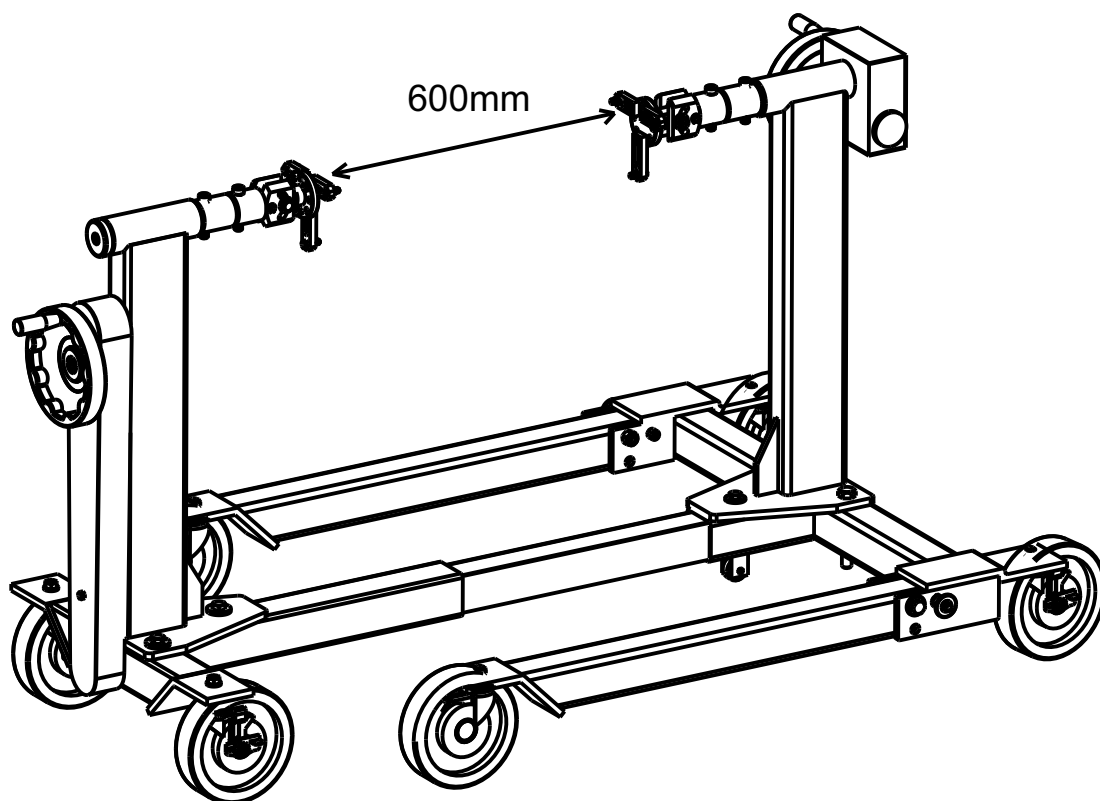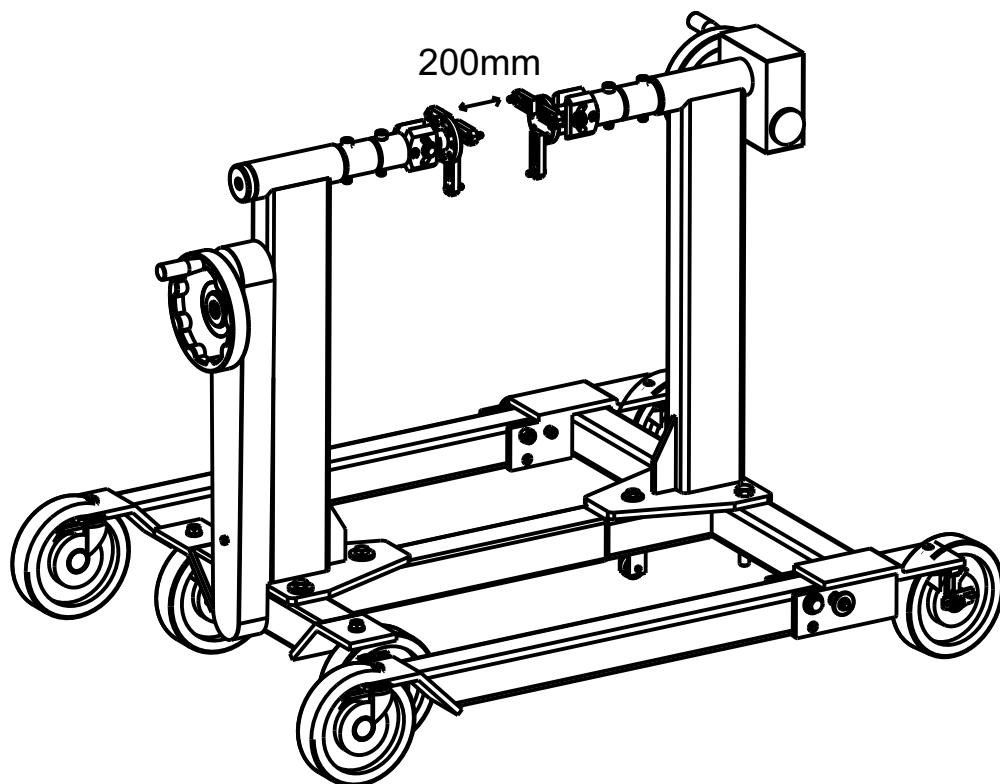

Distance adjustment


- It can lengthen the distance by turning handwheel anti-clockwise.
- It can shorten the distance by turning handwheel clockwise.

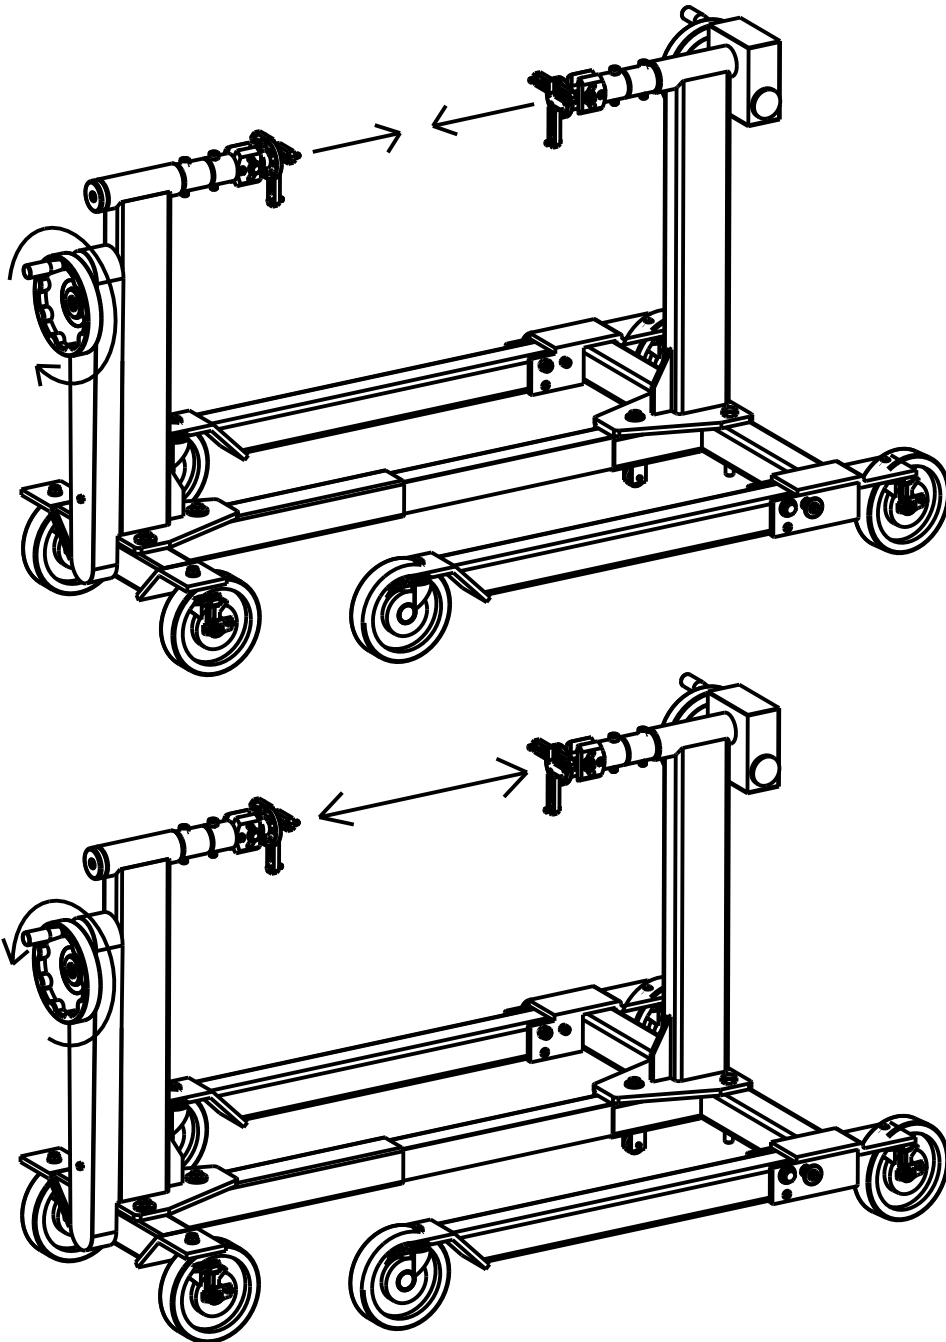


Caution: Please on the flat ground while adjusting the distance .

Function of Universal Jaw

Universal jaw can adjust 90°

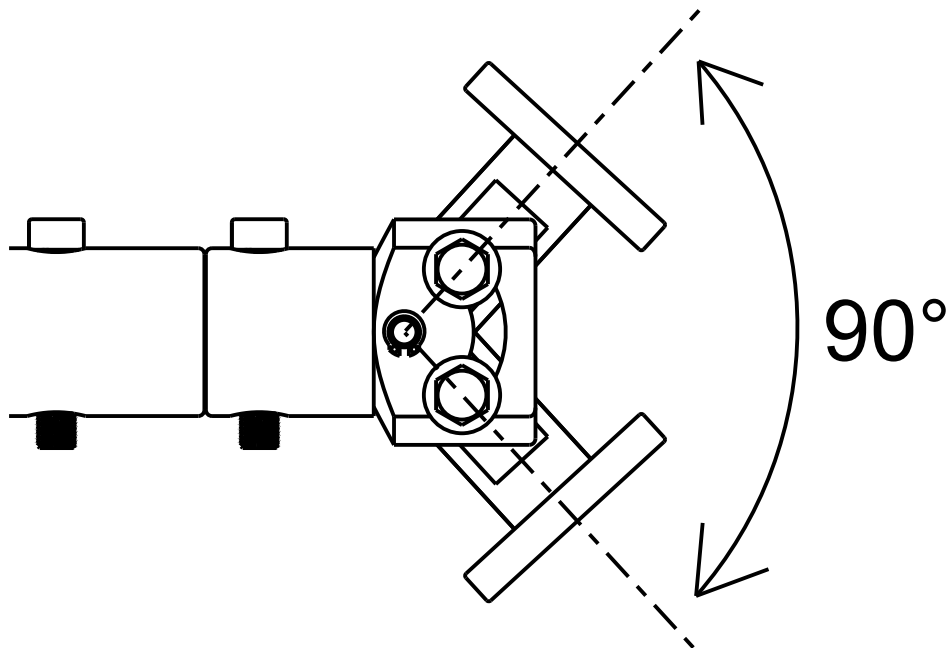

Labor-saving function of internal gear:
Turn the handwheel 360 degrees to rotate the universal jaw.

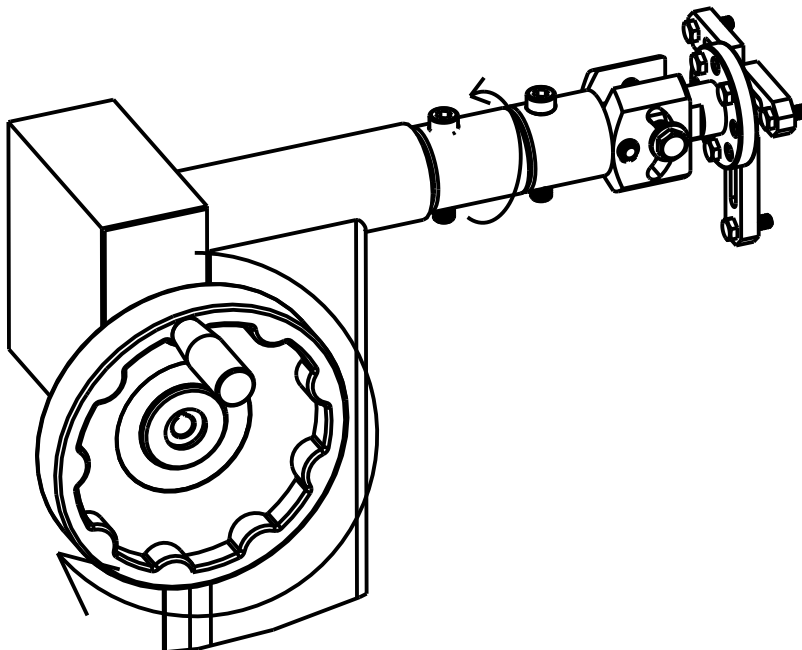

Engine installation

- Combine all parts of fig 1.
- 6-4 & 6-5, depend on the real situation to adjust the position.
- As fig 2, pass part 31 through 6-4 & 6-5 and lock the engine.

