
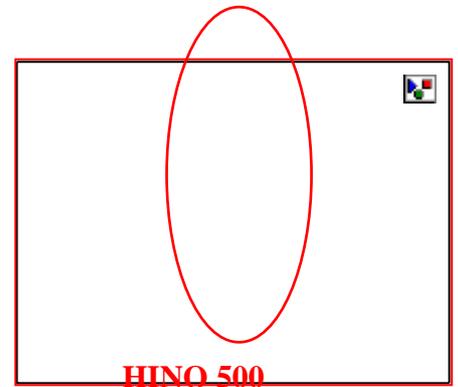
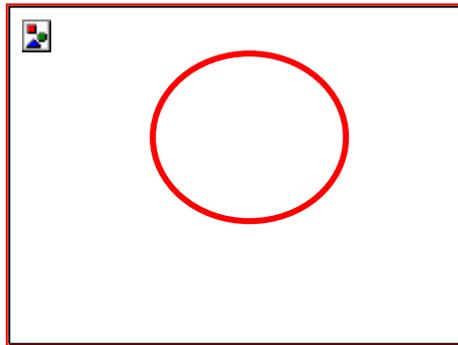


ET1407A

UNIVERSAL TRUCK BALL JOINT REMOVER (32mm)

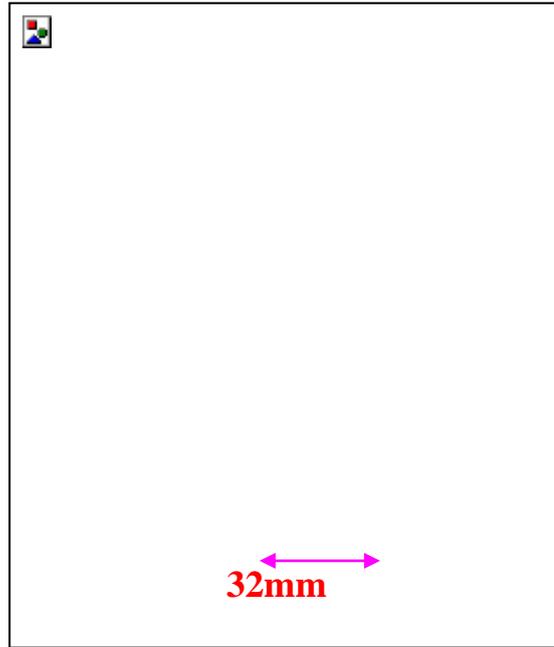

(STEERING KNUCKLE)

- Best tool for removing truck ball-joint.
- Application: Japanese trucks under 10.5 tons such as HINO · UD · ISUZU and FUSO.
- Especially works great on HINO 500.

- To remove the ball joint of tie rods. Some tie rods are special design like the second picture. There is a window opened in the remover for avoid the bulge part.
- On car maintenance.
- Best tool for removing truck ball joint.
- No damage to ball joint and related parts.
- Easy to use. Save time and money.

Technical information

1. Before using the tool, remove the safety pin first.
2. Then release the nut to the same position of bolt. In this way, it can avoid falling down and hurt people when tie rod is removed.
3. Thoroughly lubricate the bolt with the grease before use.
4. Use a hammer to hit the punch nut on the tool in order to separate the ball joint.