


ET1608A




VOLVO (FM/FM12/FH) STRAIGHT LINK BALL JOINT REMOVER

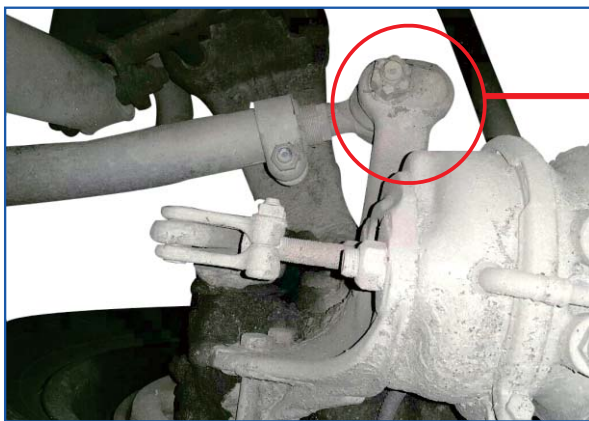

IMPORTANT: READ THESE INSTRUCTIONS CAREFULLY.

- ※Warning! Ensure Health and Safety, local authority and general work shop practice regulations are adhered to when using tools.
- ※DO NOT use tool if damaged.
- ※Maintain tool in good and clean condition for best and safest performance.
- ※WARNING! The warnings, caution and instructions referred to in this manual cannot cover all possible conditions and situations that may occur. It must be understand that common sense and caution are factors which cannot be built into this product ,but must be applied by the operator.

INSTRUCTION

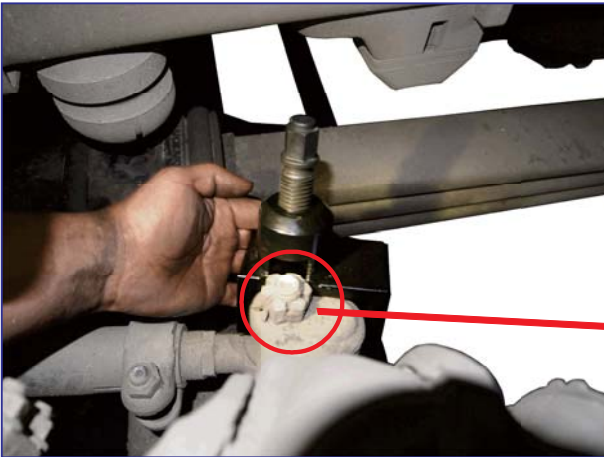

■ Put the tool onto the ball joint, you can use an air tool to turn the screw. Then the ball joint will be separated.



Please remove the nut before you remove the ball joint.

- Feature: This ball joint is a special shape, the tool is with a special design to apply the ball joint.
- Instruction: The tool used to remove the end ball joint of the drag link of VOLVO(FM12/ FM/ FH).
- Application: VOLVO (FM12/ FM/ FH) truck.
- OEM Equiv: 9998758
- Material: SCM4140
- Operation: Put the tool to the ball joint, you can use air tool to turn the screw.
- Then the ball joint will be separated.