

FLEXIBLE FUNNEL



PATENTED

1. FEATURES

2. SPECIFICATIONS


3. INSTRUCTIONS

1. FEATURES

- Funnel can be molded into different shapes, making refilling or draining easier.
- Selected material for engine oil, brake fluid, ATF, and coolant.
- Extra length suitable for truck and heavy duty vehicles
- Temperature range: -35°C and 105°C / -31°F and 221°F.



2. SPECIFICATIONS

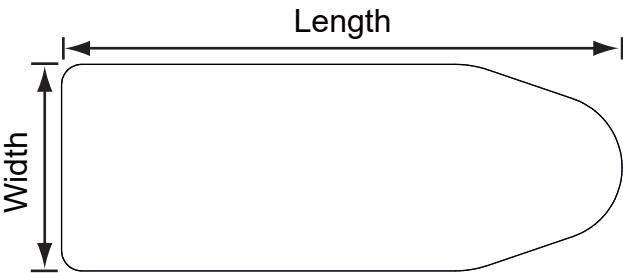

Length	556 ± 1 mm / 21.9 ± 0.4 in
Width	205 ± 1 mm / 8.1 ± 0.4 in
External Material	NBR

3. INSTRUCTIONS



CAUTION




- Always read the instructions carefully before using the tool
- Clean the surface after each use
- DO NOT use the funnel with corrosive liquids
- DO NOT soak the funnel into oil, fluid, or chemical cleaners
- Avoid exposure to sunlight for an extended period of time
- Ensure the working area has adequate lighting
- Keep children and unauthorized persons away from the working area
- Always wear eye protection that meets OSHA and ANSI Z87.1 standards
- Always wear gloves when working with the tool
- Disposal: Customers should follow local regulations to handle used/wasted parts

Molded to refill fluids



Molded to drain fluids

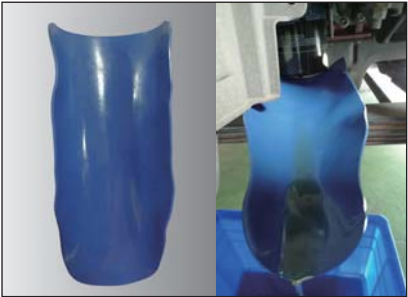

Clean surface after use

